

OFV 6

LIQUID HEATING FUEL FILTER VALVE

- Liquid heating fuel filter in one tidy, robust and compact unit.
- For use with the KBB Fire Valve range.
- Avoid expensive engineer call outs.




Application

For use on bottom take-off connections on steel or plastic domestic liquid heating fuel (LHF) tanks.

The isolating valve is positioned in the LHF feed pipe, usually near the tank, running to the boiler.

The OFV is fitted with nylon filters to trap coarse particles; this is important because the smallest particle of dirt or rust can permanently damage a boiler's LHF pump and/or block the very fine LHF atomising jet.

Outline Details

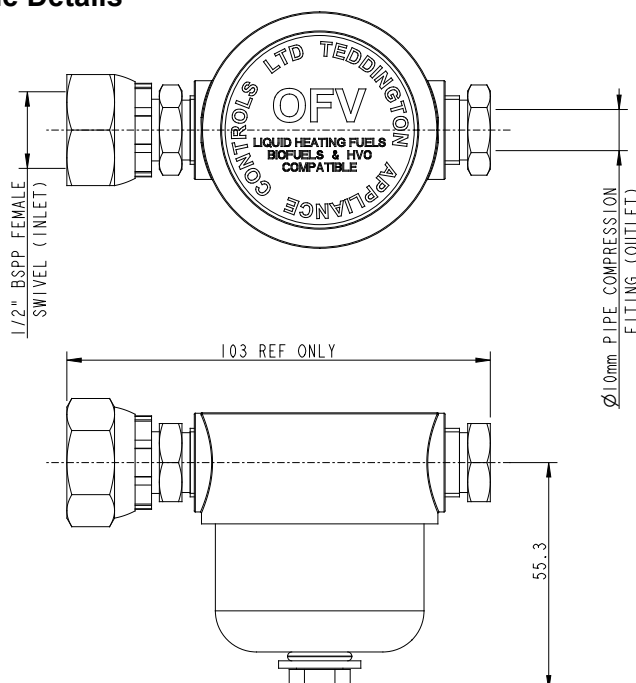

Technical Specification

Material:

Valve Body: Aluminium
Filter bowl: Steel
Filter: Nylon

Connection sizes:

In: 1/2" BSPP
Out: 10mm compression with copper olive

Flow rate: 150 l/hr at 1m head

Weight: 270g

Media:

- Kerosene
- Biofuels
- Hydrotreated Vegetable Oil (HVO)



Smart Control Systems
for a Sustainable Future
part of the Teddington Group

Manufactured by

Teddington Appliance Controls Ltd

Part of the Teddington Group

Holmbush · St. Austell · Cornwall · United Kingdom · PL25 3HG

Tel: +44 (0) 1726 222505 · Fax: +44 (0) 1726 222502

www.tedcon.com · info@tedcon.com



Iss C - 04/23